

ASSISTANT COMMISSIONER OF PATENTS  
WASHINGTON, D.C. 20231

TRANSMITTED HERewith FOR FILING IS A  
U.S. PATENT APPLICATION FOR:

Inventor(s): Osamu MAEDA  
Title: REEL ROTATION AND DETECTION MECHANISM  
FOR VIDEO CASSETTE DECK  
Attorney Docket No.: P-98F3 MG

Enclosed are:

- ☒ Patent application (specification, claims and Abstract)  
☒ 5 sheet of drawings  
☒ X FORMAL    INFORMAL  
☒ An Assignment of the Invention  
☒ A Declaration and Power of Attorney  
☐ A Verified Statement to establish small entity status under 37 CFR 1.9 and 34 CFR 1.27  
☒ Priority document: Japanese Utility Model Application No. 09-005969 filed July 9, 1997.  
☐ Enclosed ☒ Not enclosed.  
☒ Canceling and Preliminary Amendment to cancel multiple dependent claims and rewrite them in proper form.

The filing fee has been calculated as shown below (fees calculated based on number of claims after the Canceling and Preliminary Amendment).

FOR	NO. FILED	NO. EXTRA
Basic Fee		0
Total Claims		0
Indep Claims	1 =	0
<input type="checkbox"/> Multiple Dependent Claim Presented		

SMALL ENTITY	
RATE	FEE
	\$
	\$
	\$
	\$
	\$
TOTAL	\$

or  
or  
or  
or  
or  
or  
or

LARGE ENTITY	
RATE	FEE
	\$ 790.00
	\$
	\$
	\$
	\$
TOTAL	\$790.00

- ☐ Please charge my Deposit Account No. 10-0100 in the amount of \$ .  
A duplicate copy of this sheet is enclosed.
- ☒ A check in the amount of \$830.00\* to cover the filing fee is enclosed.  
\*Check includes \$40.00 assignment recording fee.
- ☒ The Commissioner is hereby authorized to charge payment of the fees associated with this communication and during the pendency of this application, such as an extension or issue fee if mistakenly not paid or insufficient, and/or any other fee due but not paid by check, etc., or credit any overpayment to Deposit Account No. 10-0100. A duplicate copy of this sheet is enclosed.

Dated: July 8, 1998  
One Chase Road  
Scarsdale, NY 10583  
(914) 723-4300

LACKENBACH SIEGEL MARZULLO  
ARONSON & GREENSPAN, P.C.

BY:

MYRON GREENSPAN  
Reg. No. 25,680

Enclosed for filing under X 35 USC 111 or    35 USC 371

Certificate of Mailing By "Express Mail"  
"Express Mail" Mailing Label No. EM173939975US  
Date of Deposit: July 8, 1998  
I hereby certify that this paper or fee is being deposited with the United States Postal Service as "Express Mail Post Office to Addressee" under 37 C.F.R. § 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.  
Print Name: MYRON GREENSPAN  
Signature: *[Signature]*

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

**MAILING CERTIFICATE**

*I hereby certify that this correspondence is being deposited with the United States Postal Services as first-class mail in an envelope addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231, on the date indicated below:*

Myron Greenspan  
Attorney's Name  
Signature  
July 8, 1998  
Date

*Applicant hereby petitions that any and all extensions of time of the term necessary to render this response timely be granted. Costs for such extension(s) and/or any other fee due with this paper that are not fully covered by an enclosed check may be charged to Deposit Account #10-0100.*

Applicant: Osamu MAEDA

Serial No.: (to be assigned)

Filing Date:

Group / Art Unit:

Examiner:

Title: Reel Rotation and Detection Mechanism for Video Cassette Deck

Docket No.: P-98F3 MG

Assistant Commissioner for Patents  
Washington, D.C. 20231

**CANCELING AND PRELIMINARY AMENDMENTS**

SIR:

This Amendment is being submitted for filing with the initial filing of this application in order to eliminate multiple dependent claims prior to fee computation. Kindly amend the above identified application as follows.

**IN THE CLAIMS:**

Kindly cancel claims 3-7, without prejudice, and add new claims 8-25 as follows.

8. A reel rotation and detection mechanism for a video cassette deck according to claim 1, wherein the light guiding member has a pillar portion extending through the deck chassis to guide the light coming from the light emitting element into the cassette on the deck chassis, and a branch portion extending sideways from the pillar portion to illuminate the light to the light receiving element, the branch portion being positioned above the deck chassis and opposite to the light passing portion or the light screening portion provided in the reel on the deck chassis.

9. A reel rotation and detection mechanism for a video cassette deck according to claim 2, wherein the light guiding member has a pillar portion extending through the deck chassis to guide the light coming from the light emitting element into the cassette on the deck chassis, and a branch portion extending sideways from the pillar portion to illuminate the light to the light receiving element, the branch portion being positioned above the deck chassis and opposite to the light passing portion or the light screening portion provided in the reel on the deck chassis.

10. A reel rotation and detection mechanism for a video cassette deck according to claim 1, wherein the light passing portion or the light screening portion is provided in the disk portion provided integrally on the reel, and the branch portion is opposite from above to the light passing portion or the light screening portion.

11. A reel rotation and detection mechanism for a video cassette deck according to claim 2, wherein the light passing portion or the light screening portion is provided in the disk portion provided integrally on the reel, and the branch portion is opposite from above to the light passing portion or the light screening portion.

12. A reel rotation and detection mechanism for a video cassette deck according to claim 8, wherein the light passing portion or the light screening portion is provided in the disk portion provided integrally on the reel, and the branch portion is opposite from above to the light passing portion or the light screening portion.

13. A reel rotation and detection mechanism for a video cassette deck according to claim 9, wherein the light passing portion or the light screening portion is provided in the disk portion provided integrally on the reel, and the branch portion is opposite from above to the light passing portion or the light screening portion.

14. A reel rotation and detection mechanism for a video cassette deck according to claim 1, wherein the light emitting element and the light receiving element are engaged on the substrate provided under the deck chassis.

15. A reel rotation and detection mechanism for a video cassette deck according to claim 2, wherein the light emitting element and the light receiving element are engaged on the substrate provided under the deck chassis.

16. A reel rotation and detection mechanism for a video cassette deck according to claim 8, wherein the light emitting element and the light receiving element are engaged on the substrate provided under the deck chassis.

17. A reel rotation and detection mechanism for a video cassette deck according to claim 9, wherein the light emitting element and the light receiving element are engaged on the substrate provided under the deck chassis.

18. A reel rotation and detection mechanism for a video cassette deck according to claim 1, wherein the light receiving element for tape detection use for receiving the light guided into the cassette to detect the leading and entraining ends of the magnetic tape is provided under the deck chassis, and a reflection plate for reflecting the light downwards from above the deck chassis is provided above the deck chassis.

19. A reel rotation and detection mechanism for a video cassette deck according to claim 2, wherein the light receiving element for tape detection use for receiving the light guided into the cassette to detect the leading and entraining ends of the magnetic tape is provided under the deck chassis, and a reflection plate for reflecting the light downwards from above the deck chassis is provided above the deck chassis.

20. A reel rotation and detection mechanism for a video cassette deck according to claim 8, wherein the light receiving element for tape detection use for receiving the light guided into the cassette to detect the leading and entraining ends of the magnetic tape is provided under the deck

chassis, and a reflection plate for reflecting the light downwards from above the deck chassis is provided above the deck chassis.

21. A reel rotation and detection mechanism for a video cassette deck according to claim 9, wherein the light receiving element for tape detection use for receiving the light guided into the cassette to detect the leading and entraining ends of the magnetic tape is provided under the deck chassis, and a reflection plate for reflecting the light downwards from above the deck chassis is provided above the deck chassis.

22. A reel rotation and detection mechanism for a video cassette deck according to claim 18, wherein the light receiving element for detecting the tape, together with the light emitting element and the light receiving element, are engaged with on the substrate under the deck chassis.

23. A reel rotation and detection mechanism for a video cassette deck according to claim 19, wherein the light receiving element for detecting the tape, together with the light emitting element and the light receiving element, are engaged with on the substrate under the deck chassis.

24. A reel rotation and detection mechanism for a video cassette deck according to claim 20, wherein the light receiving element for detecting the tape, together with the light emitting element and the light receiving element, are engaged with on the substrate under the deck chassis.

25. A reel rotation and detection mechanism for a video cassette deck according to claim 21, wherein the light receiving element for detecting the tape, together with the light emitting

element and the light receiving element, are engaged with on the substrate under the deck chassis.

**REMARKS**

This Amendment is being filed to eliminate multiple dependent claims prior to computation of filing fees. The fee has been calculated based on the claims as amended by this Amendment.

Respectfully submitted,

**LACKENBACH SIEGEL MARZULLO  
ARONSON & GREENSPAN, P.C.**

By: 

MYRON GREENSPAN

Reg. No.: 25,680

Dated: July 8, 1998

**LACKENBACH SIEGEL MARZULLO  
ARONSON & GREENSPAN, P.C.**

*One Chase Road  
Scarsdale, New York 10583  
(914) 723-4300  
MG/as*

## SPECIFICATION

### TITLE OF THE INVENTION

Reel Rotation and Detection Mechanism for Video Cassette Deck

### DETAILED DESCRIPTION OF THE INVENTION

#### FIELD OF THE INVENTION

The present invention relates to a reel detecting mechanism for optically detecting the reel rotation in a video cassette deck.

#### BACKGROUND OF THE INVENTION

In the video cassette deck, an optical leading and entraining end detecting mechanism is used so as to detect the leading end and the entraining end of the magnetic tape within the cassette set within the deck. The rotation of the reel is often detected optically by the common use of the leading and entraining end detecting mechanism and partial components. The reel detecting mechanism for commonly using the leading and entraining end detecting mechanism such as magnetic tape and its partial components are described in, for example, Japanese Patent Application Laid-Open No. 8 - 17095 and Japanese Application Laid-Open No. 129794.

Fig. 2 is a schematic plan view of a reel rotation and detection mechanism described in Japanese Patent Application Laid-Open No. 8-17095. Magnetic head cylinder, reels 10a, 10b and so on which are the major components of the video cassette deck are mounted on the deck chassis 20.

The reel rotation and detection mechanism has a light emitting element 41 provided above the deck chassis 20. The light emitting element 41 emits the light in two directions from the common use relationship between the leading end and entraining end detecting mechanism of the magnetic tape to be described later. One light to be emitted from the light emitting element 41 is divided into two directions by the light guiding member 52 for reel rotation and detection use and is guided to the light receiving elements 51a and 51b by way



of the light transmitting portions 54a and 54b provided in the reel 10a and 10b. The light transmitting portions 54a and 54b are formed in the cylindrical portion provided in the lower portions of the reels 10a and 10b, while the light receiving elements 51a and 51b are provided, above the deck chassis 20, on the inner side of the cylindrical portion.

The leading and entraining end detecting mechanism of the magnetic tape 1 divides the other light transmitted from the light emitting element 41 by the light guiding member 43 for the leading and entraining end detection use, so as to guide the light in the light receiving elements 42a and 42b by way of within the cassette 2. The light receiving elements 42a and 42b, together with the light emitting element 41 and the light receiving elements 51a and 51b for rotation detecting use, are provided above the deck chassis 20.

In this manner, the reel rotation and detection mechanism described in Japanese Patent Application Laid-Open No. 8-17095 commonly uses the light emitting element 41 between the leading and entraining end detecting mechanism of the magnetic tape 1.

Fig. 3 is a schematic elevation view of the reel rotation and detection mechanism described in Japanese Patent Application Laid-Open No. 8-129794. The reel rotation and detection mechanism is different in the common use of the light emitting element 41 and the light guiding member 52 between the the leading and entraining end detecting mechanism of the magnetic tape. The light emitting element 41 is engaged on the main substrate 30 provided under the deck chassis 20. The light receiving element 51 for reel rotation and detection use is provided on the chassis 20 through a housing 31, because it is not engaged directly on the main substrate 30 from the relation of the position on the inner side of the cylindrical portion 12 provided in the lower portion of the reel 10 although it is provided on the main substrate 30.

The reel rotation and detection mechanism is economical in that one portion of the components is commonly used between the leading end and entraining end detecting mechanism of the magnetic tape. Since the light receiving element 51

and further, the light receiving elements 42a and 42b for the leading end and the entraining end detecting use are positioned above the deck chassis 20 and are separated from the main substrate 30, whereby the wiring configuration and so on become complicated. Thus, a type is developed, wherein these light receiving elements, together with the light emitting element are positioned under the deck chassis 20, and are engaged directly on the main substrate 30.

Fig. 4 and Fig. 5 are configuration illustrating diagrams of a type with the light emitting element and the light receiving element being directly engaged on the substrate, Fig. 4 showing a leading and entraining end detecting mechanism of a magnetic tape and Fig. 5 showing a reel rotation and detection mechanism using one portion of the leading and entraining end detecting mechanism.

As shown in Fig. 4, the leading and entraining end detecting mechanism 40 of the magnetic tape is composed of a light emitting element 41 engaged on the main substrate 30 of the video cassette deck, a pair of light receiving elements 42a and 42b engaged on the main substrate 30 with the light emitting element 41 being grasped between them, a light conducting member 43 mounted on the deck chassis 20, and a pair of reflection plates 44a and 44b mounted on the deck chassis 20 with the light guiding member 43 being grasped between them.

The light conducting member 43 is a prism having a pillar portion 43a extending through the deck chassis 20, and a branch portion 43b extending obliquely and downwards from the lower end portion of the pillar portion 43a. The pillar portion 43a divides the light incident from the light emitting element 41 with the tip end portion, so as to guide the light to the reflection plates 44a and 44b on both the sides. The branch portion 43b is positioned under the deck chassis 20 for the rotation and the detection of the reel 10 to be described later, so as to guide sideways one portion of the light which is incident from the light emitting element 41.

When the cassette is set in the video cassette deck, the pillar portion 43a of the light guiding member 43 is inserted into the concave portion provided in

the under face of the cassette. When the light emitting element 41 is emitted in this condition, the light passes the pillar portion 43a of the light guiding member 43 and divides onto both the sides.

When the magnetic tape within the cassette is in the leading end portion, one of the light divided on both the sides by the tip end portion of the light conducting member 43 passes the transmission portion on the leading end side of the magnetic tape and receives the light to one light receiving element 42a by way of one reflection plate 44a. As the other light is screened by a magnetically coated portion of the magnetic tape, it does not reach to the other light receiving element 42b. Thus, the leading end of the magnetic tape is detected.

When the magnetic tape within the cassette is in the entraining end portion, one of the light divided onto both the sides by the tip end portion of the light guiding member 43 is screened with the magnetically coated portion of the magnetic tape, whereby the light does not reach one light receiving element 42a. The other light transmits the transmitting portion on the entraining end side of the magnetic tape, and receives the light to the other light receiving element 42b by way of the other reflection plate 44b.

As shown in Fig. 5, the conventional reel rotation and detection mechanism 50 using one portion of the leading and entraining end detecting mechanism 40 of the magnetic tape is composed of the aforementioned light emitting element 41 engaged on the main substrate 30, a specific light emitting element 51 for rotation and detection engaged on the main substrate 30, the aforementioned light guiding member 43 mounted on the deck chassis 20, a specific light guiding member 52 for rotation and detection mounted on the under face of the deck chassis 20, a sensor gear 53 and so on.

The specific light guiding member 52 for rotation and detection use is a prism for guiding, to the light receiving light element 51, the light coming from the branch portion 43b of the light guiding member 43. The sensor gear 53 is rotated in synchronous relation with the reel 10 by interlocking with the

reel 10 through the intermediate gear 54. The light screening portions 53a and 53a are provided in two positions in the peripheral direction of the sensor gear 53. The light screening portions 53a and 53a are to cross the light path reaching from the branch portion 43b of the light guiding member 43 to the light guiding member 52 through the rotation of the sensor gear 53.

The light, incident into the light guiding member 43 from the light emitting element 41, is divided for the branch 43b. The light is guided to the light receiving element 51 through the light guiding member 52. The rotation of the reel 10 is detected, because the light screening portions 53a and 53a are to cross the light path reaching the light guiding member 52 from the branch portion 43b through the rotation of the sensor gear 53.

#### PROBLEMS TO BE SOLVED BY THE INVENTION

Since the conventional reel rotation and detection mechanism 50 detects the rotation of the reel 10 with the common use of partial components (the light emitting element 41 and the light guiding member 43) between the leading and entraining end detecting mechanism 40 of the magnetic tape, the conduction is simple and economical. Further, the light emitting element 41 and the light receiving element 51 are simple in construction and economical in that they are directly engaged on the main substrate 30.

Since the light receiving element 51 is directly engaged on the main substrate 30 lower than the deck chassis 20, the light guiding member 52 and the sensor gear 53, further, specific components such as intermediate gear 54 or the like are used, thus remaining many in the number of the components. Thus, the manufacturing cost of the reel rotation and detection mechanism 50, and the video cassette deck cannot be lowered sufficiently.

Accordingly, an object of this invention is to provide a reel rotation and detection mechanism of the video cassette deck which is considerably simple in construction and economical despite the provision of the light emitting element and the light receiving element under the deck chassis.

## MEANS FOR SOLVING THE PROBLEMS

004438-07000

A reel rotation and detection mechanism for a video cassette deck of claim 1 of this invention comprises a light emitting element for conducting the leading and entraining end detection of the magnetic tape within a cassette set within the video cassette deck, a light guiding member for guiding the light from the light emitting element into the cassette for conducting the leading and entraining detection of the magnetic tape, and directly conducting onto the reel side for conducting the rotation and detection of the light, a light receiving element for receiving the light conducted onto the side of the reel, a light passing portion or a light screening portion provided on the reel so as to cross the light path reaching from the light guiding member to the light receiving element through the rotation of the reel. It is characterized in that the light emitting element and the light receiving element are provided under the deck chassis for mounting main components including the reel of the video cassette deck, and the light guiding member guides the light coming from the light emitting element to the light receiving element under the chassis by way of the light transmission portion or the light screening portion provided on the reel on the deck chassis.

In the reel rotation and detection mechanism for the video cassette deck according to claim 2 of this invention, the deck chassis has a transmitting opening portion for passing the light the light downwards from above.

In the reel rotation and detection mechanism for the video cassette deck according to claim 3 of this invention, the light guiding member has a pillar portion extending through the deck chassis to guide the light, coming from the light emitting element, into the cassette on the deck chassis, and a branch portion extending sideways from the pillar portion to illuminate the light to the light receiving element, the branch portion being positioned above the deck chassis and opposite to the light passing portion or the light screening portion provided in the reel on the deck chassis.

In the reel rotation and detection mechanism of the video cassette deck

according to claim 4 of this invention, the light passing portion or the light screening portion is provided in the disk portion provided integrally on the reel, and the branch portion is opposite from above to the light passing portion or the light screening portion.

In the reel rotation and detection mechanism of the video cassette deck according to claim 5 of this invention, the light emitting element and the light receiving element are engaged on the substrate provided under the deck chassis.

In the reel rotation and detection mechanism of the video cassette deck according to claim 6 of this invention, the light receiving element for leading and entraining end detecting use for receiving the light guided into the cassette to detect the leading and entraining end of the magnetic tape is provided under the deck chassis, and a reflection plate for reflecting the light downwards from above the deck chassis is provided above the deck chassis.

In the reel rotation and detection mechanism of the video cassette deck according to claim 7 of this invention, a light receiving element for detecting the leading and entraining ends, together with the light emitting element and the light receiving element, are engaged with on the substrate under the deck chassis.

In such a configuration, the light from the light emitting element is directly guided onto the side of the reel for the rotation and the detection of the reel by using the light guiding member for conducting the leading and entraining end detection of the magnetic tape. The rotation of the reel is detected by intermittent screening of the light by one portion of the reel through the rotation of the reel. Since the light of the light emitting element is guided downwards by way of the upward portion from the downwards of the chassis deck, the rotation and detection can be conducted by the use of the light transmitting portion or the light screening portion provided on the reel on the chassis deck. Thus, despite the provision of the light emitting element and the light receiving element under the chassis deck, the specific light

guiding member for rotation and detection use, the sensor gear, and further the intermediate gear are removed from the side of the reel rotation and detection mechanism.

#### EMBODIMENT

The embodiment of this invention will be described hereinafter referring to the drawings. Fig. 1 is a schematic configuration view of a reel rotation and detection mechanism of the embodiment of this invention.

A reel rotation and detection mechanism 60 of the embodiment of this invention detects the rotation of the reel 10 supported rotatably on a deck chassis 20 of a video cassette deck. The reel rotation and detection mechanism 60 is comprised of a light emitting element 61 and a light receiving element 62 engaged on a main substrate 30 provided below the deck chassis 20, and a light guiding member 63 mounted on the deck chassis 20.

The reel 10 can be either for feeding or taking-up use. Here it is to detect the rotation of the feeding reel.

The light emitting element 61 and the light guiding member 63 are sharing parts to be commonly used between the leading end and the trailing end detecting mechanism of the magnetic tape corresponding to the light emitting element 41 and the light guiding member 43 shown in Fig. 4 and Fig. 5. A specific parts for detecting the rotation is a light receiving element 62. This light receiving element 62 is, for example, a photo transistor for receiving the light emitted from the light emitting element 61 such as infrared LED or the like, and is engaged upwardly, together with the light emitting element 61, on the main substrate 30.

The light guiding member 63 is a prism having a pillar portion 63a extending through the deck chassis 20, a branch portion 63b extended sideways from the middle stage portion of the pillar 63a, and a mounting portion 63c extended sideways from the pillar portion 63a for mounting the light guiding member 63 on the deck chassis 20.

The pillar portion 63a of the light guiding member 63, provided vertically upwards of the light emitting element 61, divides the light onto both the sides with its tip end portion incident from the light emitting element 61 for the leading and entraining ends of the magnetic tape as before (see Fig. 4).

The branch portion 63b to be used in the rotation and detection of the reel 10 guides sideways one portion of the light incident into the pillar portion 63a to output it immediately under from the tip end portion. The branch portion 63b is above the deck chassis 20 to directly guide the light to the reel 10 on the deck chassis 20, with the tip end portion being opposed from above to the outer peripheral portion of the reel 10.

A disk portion 13 is provided in the lower portion of the reel 10, and an opening portion 11 as a light transmitting portion is provided in the disc portion 13. The opening portion 11 is to pass immediately under the tip end portion of the branch 63b, through the rotation of the reel 10. An opening portion 21 for light transmission use is provided in the deck chassis 20 immediately under of the tip end portion of the branch portion 63b.

The light receiving element 62 is just under the opening portion 21 of the deck chassis 20, and opposes to the tip end portion of the branch portion 63b through the opening portion 21.

Although not shown in Fig. 1, the light receiving elements 42a and 42b for the leading and entraining end detecting use are engaged on the main substrate 30 as in the leading and entraining end detecting mechanism 40 of the magnetic tape of Fig. 4. In order to guide to the light receiving elements 42a and 42b the light divided onto both the sides by the tip end portion of the pillar portion 63a of the light guiding member 63 are provided reflection plates 44a and 44b above the deck chassis 20.

The function of the reel rotation and detection mechanism 60 of the embodiment of this invention will be described.

When the light emitting element 61 emits its light, the light passes through the pillar portion 63a of the light emitting member 63 and is divided to



both the sides by the tip end portion. The lights are used in the leading and entraining end detection of the magnetic tape as above described.

One portion of the light incident into the light guiding member 63 is branched for the branch portion 63b. The light is illuminated from just above into the outer peripheral portion of the rotating reel 10 from the tip end portion of the branch 63b. An opening portion 11 is provided in the outer peripheral portion of the reel 10. An opening portion 21 is provided, in the deck chassis 20, just under the tip end portion of the branch portion 63b.

Thus, the light incident from the tip end portion of the branch portion 63b passes the opening portions 11 and 21 each time the opening portion 11 reaches just under the tip end portion of the branch portion 63b through the rotation of the reel 10 and reaches the light receiving element 62.

On the side of the reel rotation and detection mechanism 60 is detected the rotation of the reel 10, even when not provided a specific light guiding member 52 for rotation and detection use, a sensor gear 53, and an intermediate gear 54 as shown in Fig. 5, as they are provided.

In the embodiment, a light path reaching to the light receiving element 62 from the branch portion 63b of the light conducting member 63 is constructed as the opening portion 11 provided in the reel 10 crosses it. The reel 10 can be rotated and detected likewise by provision of a projection like light screening portion, instead of the opening portion 11, on the outer peripheral portion of the reel 10.

In the embodiment, this invention is not restricted to the light emitting element 61 and the light receiving element 62, which are described on the main substrate 30 provided under the deck chassis. The light emitting element 61 and the light receiving element 62 can be engaged with a different component of another substrate of, for example, a main substrate 30. Either member to be engaged with the light emitting element 61 and the light receiving element 62 should be determined in relation to surrounding space or the like.

## EFFECT OF THE INVENTION

As described above, in the reel rotation and detection mechanism of the video cassette deck of the claim 1 of this invention, the light from the light emitting element is guided downwards by way of the above from under the deck chassis by using the light guiding member for conducting the leading, entraining end detection of the magnetic tape to detect the rotation of the reel on the deck chassis. Despite the provision of the light emitting element and the light receiving element under the deck chassis, the specific light guiding member for rotation and the detection from the side of the reel rotation and detection mechanism, the sensor gear, and further the intermediate gear are removed. Thus, the wiring construction is simplified and the item of the components is considerably reduced in number as compared with the conventional reel rotation and detection mechanism. Thus, the reel rotation and detection mechanism, and the video cassette tape deck can be reduced in manufacturing cost.

In the reel rotation and detection mechanism of the video cassette deck of the claim 2 of this invention, the construction of an opening portion for light transmission where the deck chassis transmits the light downwards from above guides the light with short distance downwards from above of the deck chassis, consequently the reel rotation and detection mechanism is down-sized.

In the reel rotation and detection mechanism of the video cassette deck of the claim 3 of this invention, the light guiding member has a pillar portion extending through the deck chassis to guide the light coming from the light emitting element into the cassette on the deck chassis, and a branch portion extending sideways from the pillar portion to illuminate the light to the light receiving element, the branch portion being positioned above the deck chassis and opposite to the light passing portion or the light screening portion provided in the reel on the deck chassis to simplify the light conducting member to particularly reduce the number of the components. The light path from the light emitting element to the light receiving element becomes short to

make the reel rotation and detection mechanism small in size.

In the reel rotation and detection mechanism of the video cassette deck of the claim 4 of this invention, the light passing portion or the light screening portion is provided in the disk portion provided integrally on the reel, the branch portion of the light guiding member is opposite from above to the light passing portion or the light screening portion so that the light path from the light emitting element to the light receiving element become much shorter and the reel rotation and detection mechanism is made particularly small in size.

In the reel rotation and detection mechanism of the video cassette deck of the claim 5 of this invention, the light emitting element and the light receiving element are engaged on the substrate provided under the deck chassis to simplify the lower construction of the deck chassis.

In the reel rotation and detection mechanism of the video cassette deck of the claim 6 of this invention, the light receiving element for leading and entraining end detecting use for receiving the light guided into the cassette to detect the leading and entraining ends of the magnetic tape is provided under the deck chassis, and a reflection plate for reflecting the light downwards from above the deck chassis is provided above the deck chassis so as to simplify the wiring construction or the like even in the leading and entraining end detecting mechanism of the magnetic tape.

In the reel rotation and detection mechanism of the video cassette deck of the claim 7 of this invention, a light receiving element for detecting the leading and entraining ends, together with the light emitting element and the light receiving element, are engaged with on the substrate under the deck chassis so as to simplify the construction under the deck chassis.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic configuration and elevation view of a reel rotation and detection mechanism of the embodiment of this embodiment;

Fig. 2 is a schematic construction and plan view of the reel rotation and

detection mechanism for using one portion of the leading and entraining end detection mechanism of the magnetic tape;

Fig. 3 is a schematic construction and elevation view of conventional another reel rotation and detection mechanism using one portion of the leading and entraining end mechanism of the magnetic tape;

Fig. 4 is a schematic construction and elevation view of the leading and entraining end detection mechanism of the magnetic tape; and

Fig. 5 is a schematic construction and elevation view of the conventional reel rotation and detection mechanism using one portion of the leading and entraining end detection mechanism of the magnetic tape of Fig. 4.

#### DESCRIPTION OF THE REFERENCE NUMERALS

- 10 ... reel
- 11 ... opening portion (light transmitting portion)
- 13 ... disk portion
- 20 ... deck chassis
- 21 ... opening portion
- 60 ... reel rotation and detection mechanism
- 61 ... light emitting element
- 62 ... light receiving element
- 63 ... light guiding member
- 63a .. pillar portion
- 63b .. branch portion

WHAT IS CLAIMED IS:

(1) A reel rotation and detection mechanism for a video cassette deck comprising;

a light emitting element for conducting the leading and entraining end detection of a magnetic tape within a cassette set within the video cassette deck, a light guiding member for guiding the light from the light emitting element into the cassette for conducting the leading and entraining detection of the magnetic tape, and directly guiding the light onto the side of the reel for the rotation and detection of the reel, a light receiving element for receiving the light guided onto the side of the reel, a light passing portion or a light screening portion provided on the reel so as to cross the light path reaching from the light guiding member to the light receiving element through the rotation of the reel, characterized in that the light emitting element and the light receiving element are provided under the deck chassis for mounting main components including the reel of the video cassette deck, and the light guiding member guides the light from the light emitting element to the light receiving element under the deck chassis by way of the light passing portion or the light screening portion provided on the reel on the deck chassis.

(2) A reel rotation and detection mechanism for a video cassette deck according to claim 1, wherein the deck chassis has an opening portion for light transmission for transmitting the light downwards from the above.

(3) A reel rotation and detection mechanism for a video cassette deck according to claim 1 or 2, wherein the light guiding member has a pillar portion extending through the deck chassis to guide the light coming from the light emitting element into the cassette on the deck chassis, and a branch portion extending sideways from the pillar portion to illuminate the light to the light receiving element, the branch portion being positioned above the deck chassis and opposite to the light passing portion or the light screening portion provided in the reel on the deck chassis.

(4) A reel rotation and detection mechanism for a video cassette deck according

to claim 1, 2 or 3, wherein the light passing portion or the light screening portion is provided in the disk portion provided integrally on the reel, and the branch portion is opposite from above to the light passing portion or the light screening portion.

(5) A reel rotation and detection mechanism for a video cassette deck according to claim 1, 2, 3 or 4, wherein the light emitting element and the light receiving element are engaged on the substrate provided under the deck chassis.

(6) A reel rotation and detection mechanism for a video cassette deck according to claim 1, 2, 3, 4 or 5, wherein the light receiving element for tape detection use for receiving the light guided into the cassette to detect the leading and entraining ends of the magnetic tape is provided under the deck chassis, and a reflection plate for reflecting the light downwards from above the deck chassis is provided above the deck chassis.

(7) A reel rotation and detection mechanism for a video cassette deck according to claim 6, wherein the light receiving element for detecting the tape, together with the light emitting element and the light receiving element, are engaged with on the substrate under the deck chassis.

## ABSTRACT

[SUMMARY]

[OBJECT]

An object of this invention is to reduce the manufacturing cost simplifying a reel rotation detecting mechanism in a video cassette deck.

[CONSTRUCTION]

A light emitting element 61 and a light receiving element 62 are engaged on a main substrate 30 provided under a deck chassis 20. On the deck chassis 20 is mounted a light guiding member 63 comprised of a pillar portion 63a extending through the deck chassis 20 and a branch portion 63b extending sideways from the pillar portion 63a. In order to detect the loading and trailing ends of the magnetic tape, the pillar portion 63a guides the light coming from the light emitting element into the cassette set into the deck. The branch portion 63b, above the deck chassis 20, guides one portion of the light incident to the pillar portion 63a to the reel 10 on the deck chassis 20.

The rotation of the reel 10 is detected by receiving the light with the light receiving element 62 on the main substrate 30 through the opening portion 11 provided in the reel 10 and the opening 21 provided in the deck chassis 20.

[SELECTION VIEW] Fig. 1

FIG. 1

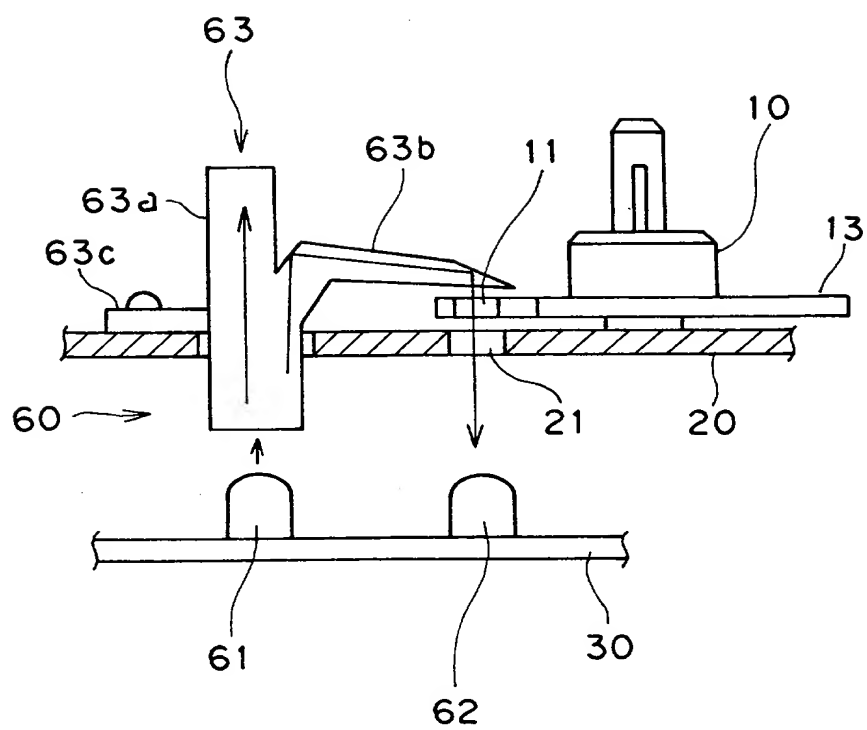






FIG. 3

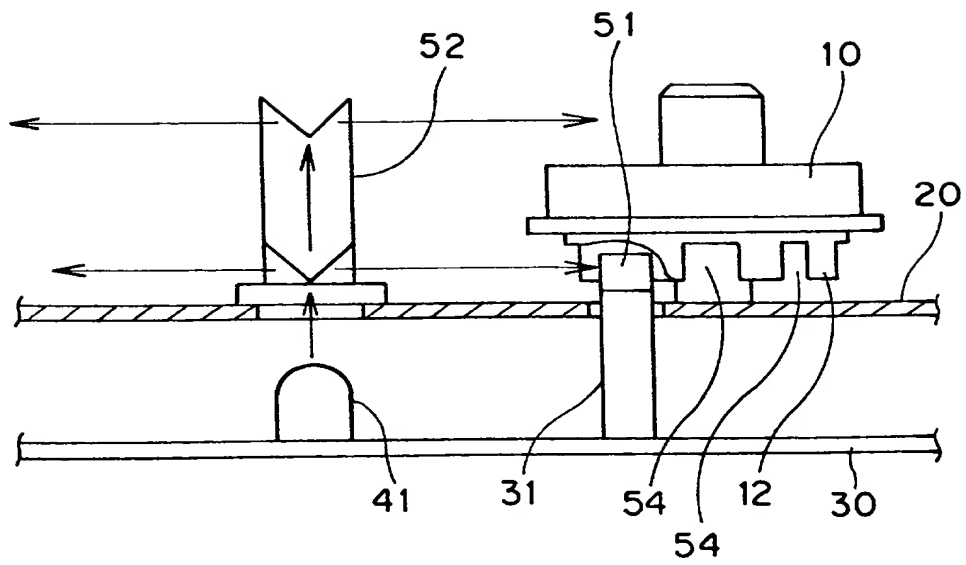


FIG. 4


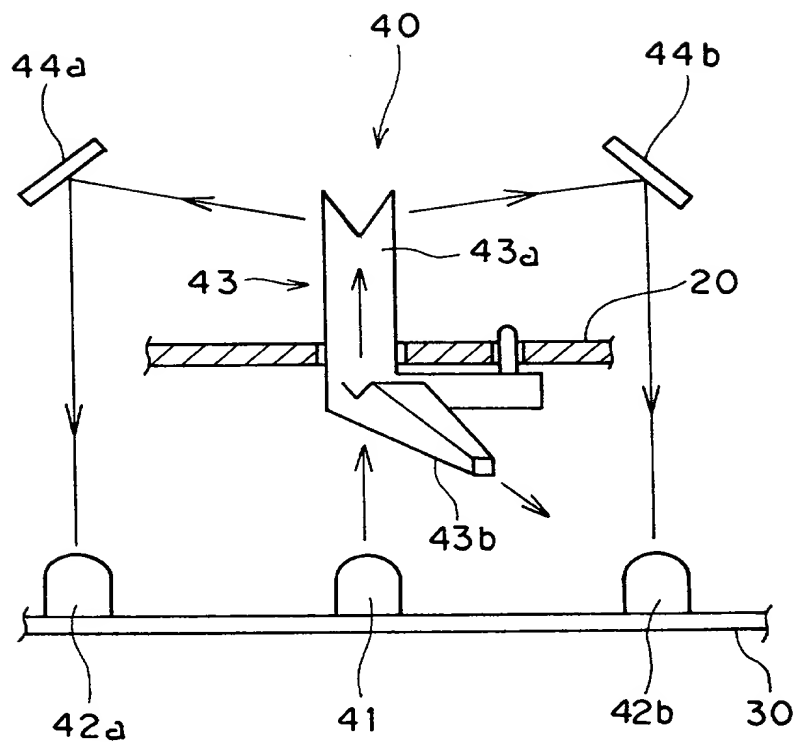


FIG. 5

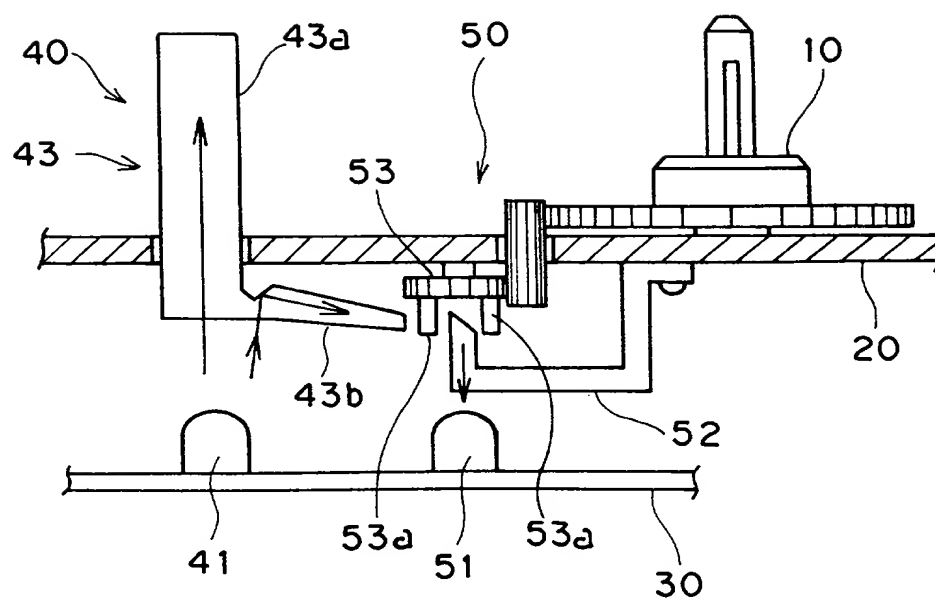

UNITED STATES -- PATENT  
DECLARATION FOR PATENT APPLICATION

Attorney's Docket No.: P-98F3  
MG

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Reel Rotation and Detection Mechanism for Video Cassette Deck

the specification of which

(check one) ☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as

Application Serial No.: \_\_\_\_\_

and was amended on \_\_\_\_\_

(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):

Appln. No.	Country	Date Filed	Priority Claimed
U 09-005969	Japan	9 JULY 1997	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Appln. Serial No.	Filing Date	Status: Patented, Pending, Abandoned
		<input type="checkbox"/> Patented <input type="checkbox"/> Pending <input type="checkbox"/> Abandoned
		<input type="checkbox"/> Patented <input type="checkbox"/> Pending <input type="checkbox"/> Abandoned
		<input type="checkbox"/> Patented <input type="checkbox"/> Pending <input type="checkbox"/> Abandoned

New Application of (inventors)  
Title:

Page 2 of 2

**POWER OF ATTORNEY**

I hereby appoint the following attorney(s) and/or agent(s) to prosecute the application entitled Reel Rotation and Detection Mechanism for Video Cassette Deck and to transact all business in the Patent and Trademark Office connected therewith:

HENRY A. MARZULLO, JR., Reg. No. 20,910;  
HOWARD N. ARONSON, Reg. No. 27,302; and  
MYRON GREENSPAN, Reg. No. 25,680.

Address all telephone calls to *Myron Greenspan*, at telephone number (914) 723-4300, or to the attorney executing the last document.

Address all correspondence to **LACKENBACH SIEGEL MARZULLO ARONSON & GREENSPAN, P.C.** at **Penthouse Suite, One Chase Road, Scarsdale, New York 10583 U.S.A.**  
I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First or Sole Inventor Osamu Maeda	Citizenship Japanese
RESIDENCE Address -- Street	POST OFFICE Address -- Street <sup>C/O FUNAI</sup> ELECTRIC CO., LTD. 7-1-7 NAKAGAITO,
City (Zip)	City (Zip) DAITO, OSAKA, 574, JAPAN
State or Country Japan	State or Country Japan
Date 26 June 1998	Signature 前多 治
Full Name of Second Joint Inventor	Citizenship
RESIDENCE Address -- Street	POST OFFICE Address -- Street
City (Zip)	City (Zip)
State or Country	State or Country
Date	Signature

☐ Additional inventors are being named on separately numbered sheets attached hereto.